

# WPG series

Switch guard for switch series WP



## DISTINCTIVE FEATURES

Prevent accidental lever operation  
Latching



## ENVIRONMENTAL SPECIFICATIONS

- Salt spray test: 96 hours (IEC 68-2-11)
- Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)



## MATERIALS


- Support plate: black chrome plated brass
- Guard: inox



# WPG series

Switch guard for switch series WP

## BUILD YOUR PART NUMBER

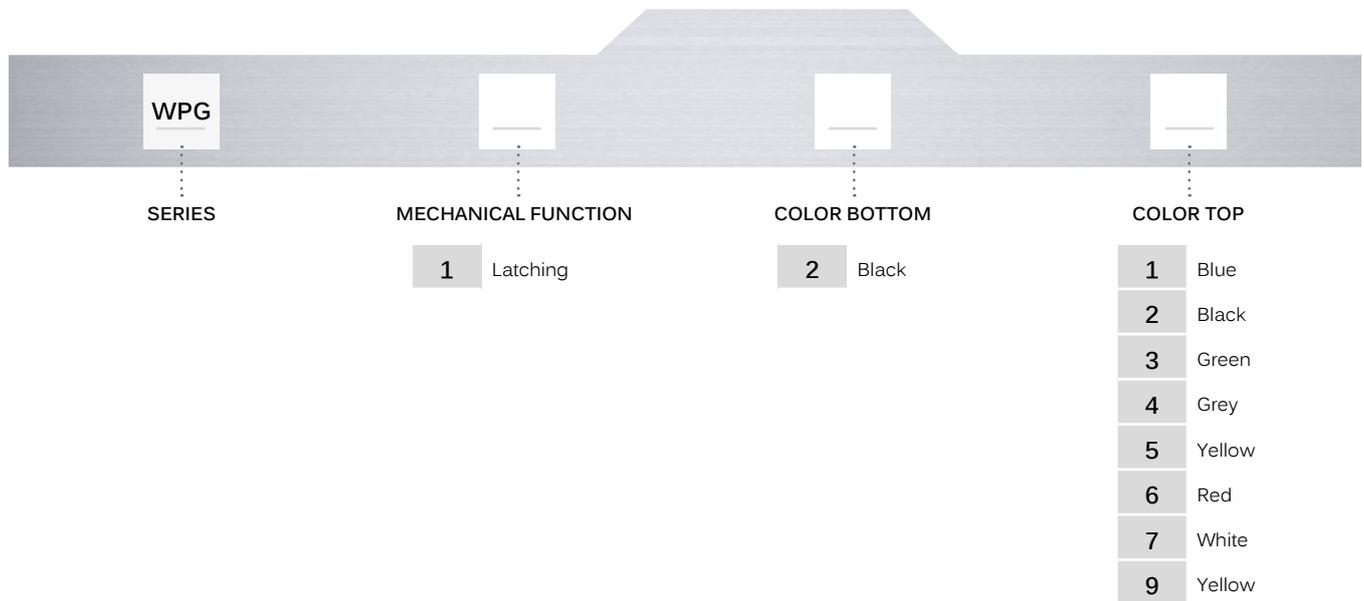

## ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.

-  **Notice:** please note that not all combinations of above numbers are available. Refer to the following pages for further information.
-  **A sealing boot** is available to protect the switches against frost and sand (P/N U5125). See "Sealing Boots" section of website.
-  **Mounting accessories:** Standard hardware supplied: 1 hex nut 14 mm (.551) across flats and 1 O-Ring.

# WPG series

Switch guard for switch series WP

## DIMENSIONS

